

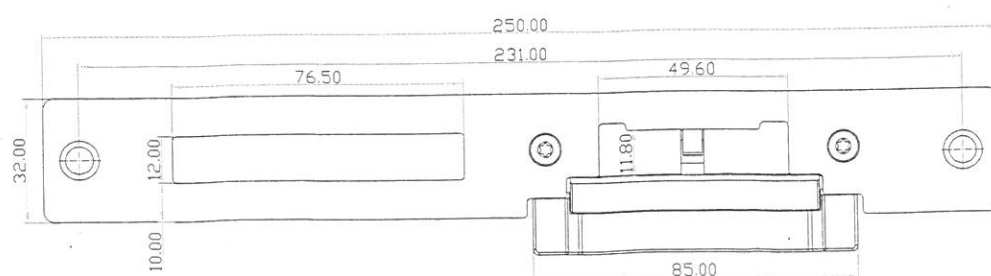
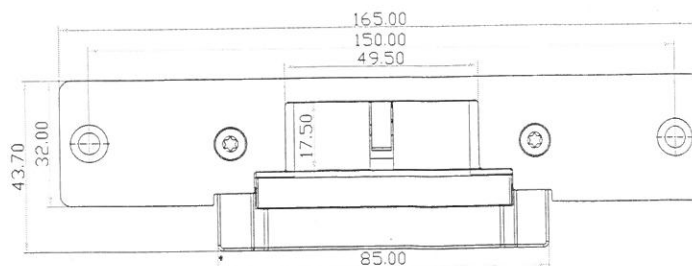


Heavy Duty Electric Strike (NO/NC Adjustment)

Specification

Dimension	123.5Lx43.7Wx35H(mm) 165Lx43.7Wx35H(mm) 250Lx43.7Wx35H(mm)
Voltage	DC12V or DC24V
Current	12V/320mA;24V/160mA
Strike Structure	304 Stainless Steel
Holding Force	1000kg
Feature	Fail secure(NO);Fail safe(NC)
Suitable for	Wooden door/Metal door/Glass door/PVC door
Suitable Temperature	-10℃~+55℃(14-131F)
Operating Humidity	0~95%
Durable design	Mechanical test: 1, 000, 000 times
Weight	0.38kg/0.4kg/0.42kg

Dimension (unit:mm)

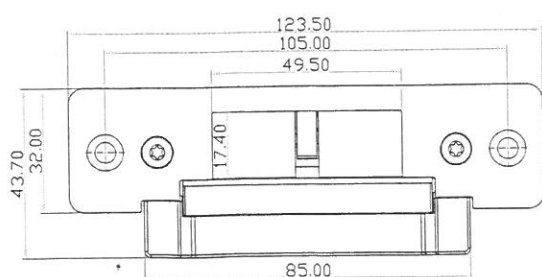

Signal Output


Green: NO
White: COM
Yellow: NC

Door Status

N.C. contact output : open status
N.O. contact output : closed status


Red: +
Black: -

12VDC or 24VDC




Accessories

If the door frame is too thick, please use the extension plate. Installation is as the follows.



Extension plate

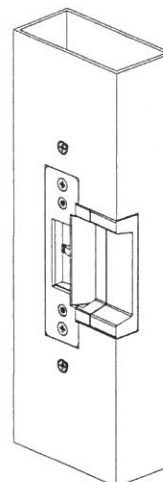


Function Conversion

You can set the operation mode of Fail Safe or Fail Secure.


Loose the screw and tighten it in the other hole.

Fail Safe(NC): When power off, the door is in the open status.

Fail Secure(NO): When power off, the door is in the closed status.




Fail Secure




Fail Safe

Options of Mechanical Lock

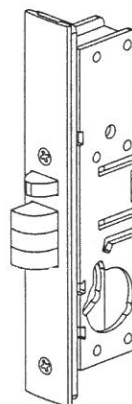

ANSI Type Mechanical Lock

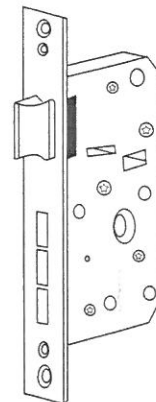

European Type Mechanical Lock

Installation Diagram

